

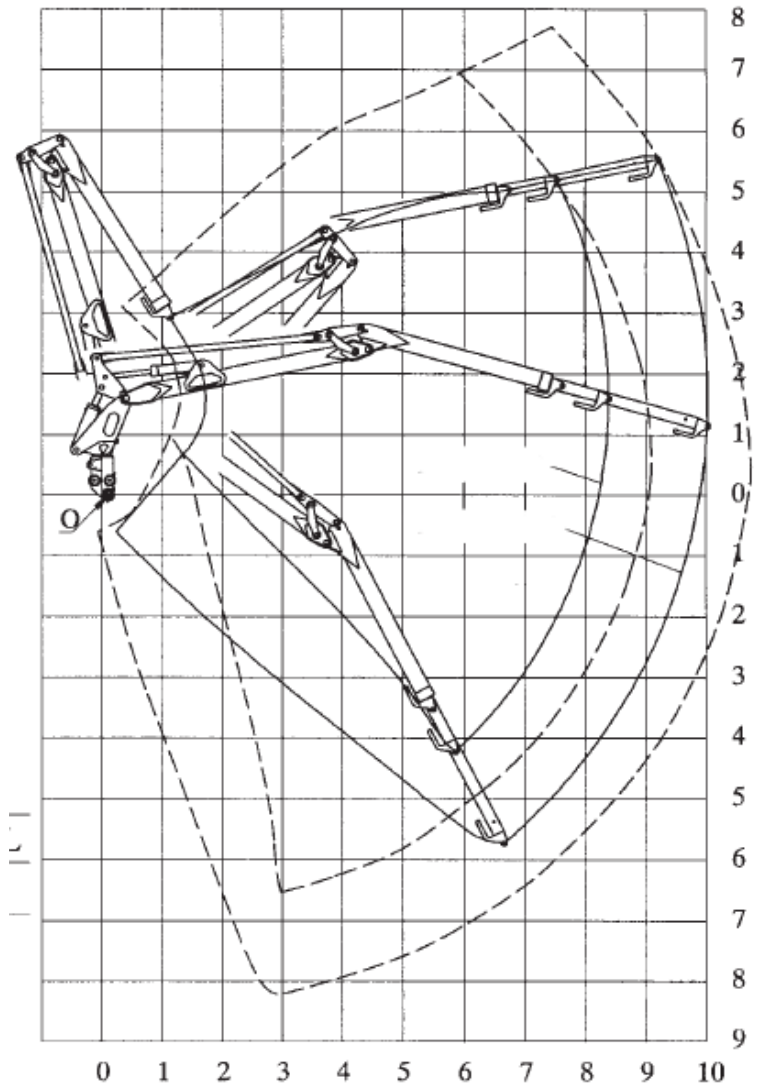
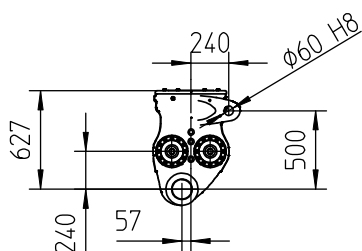
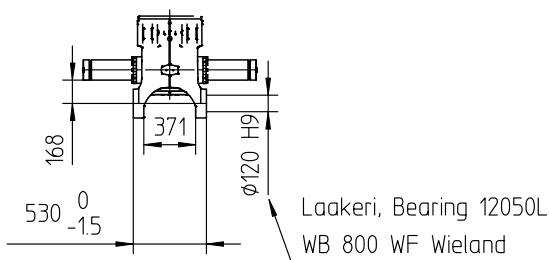
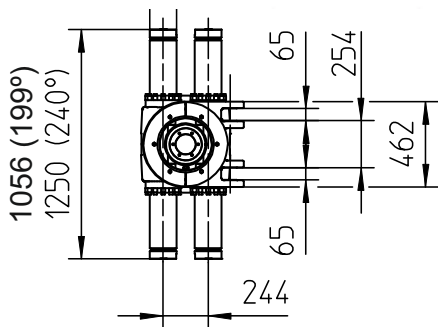
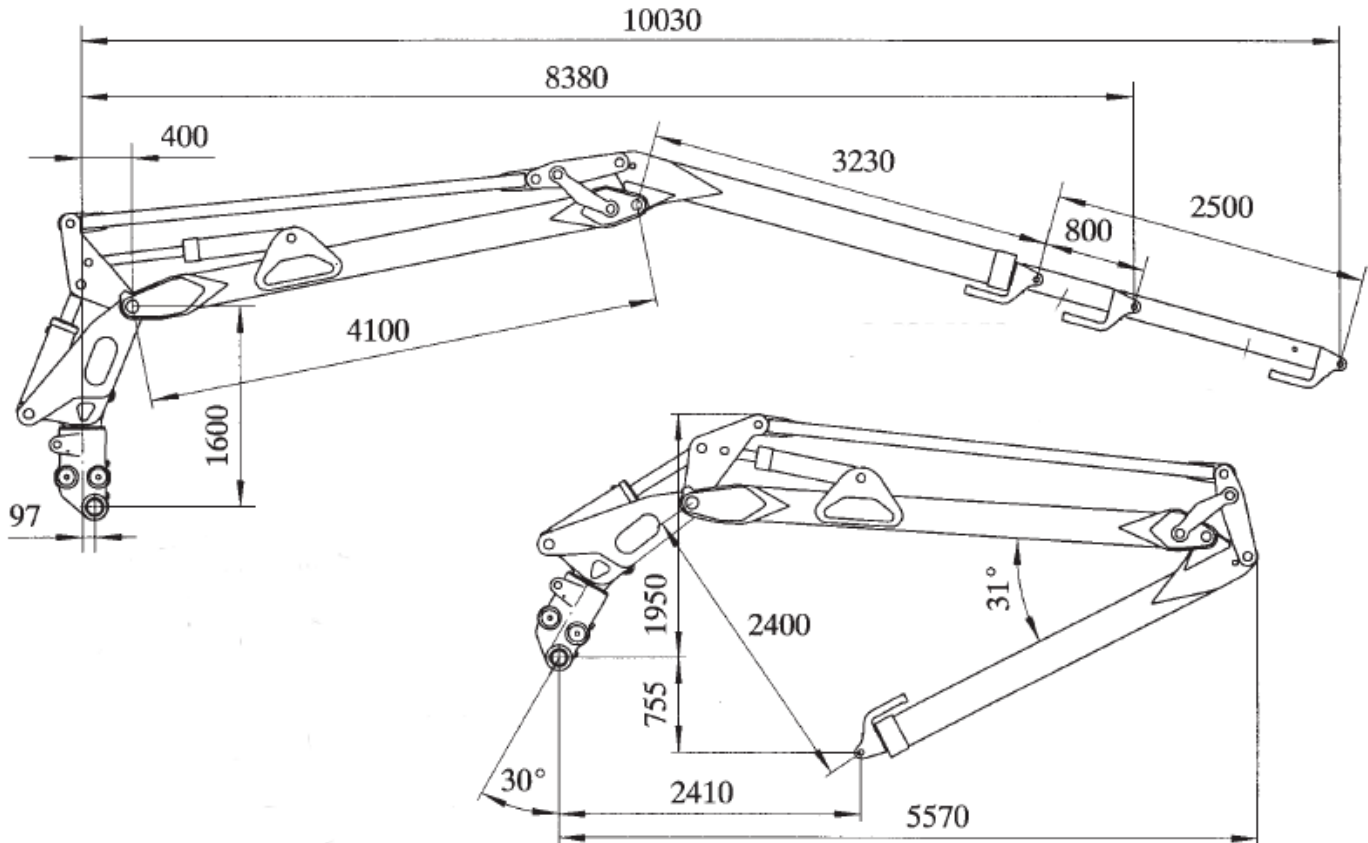


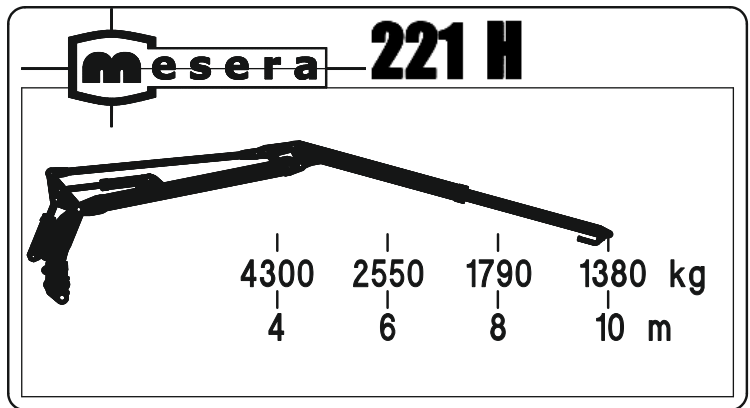

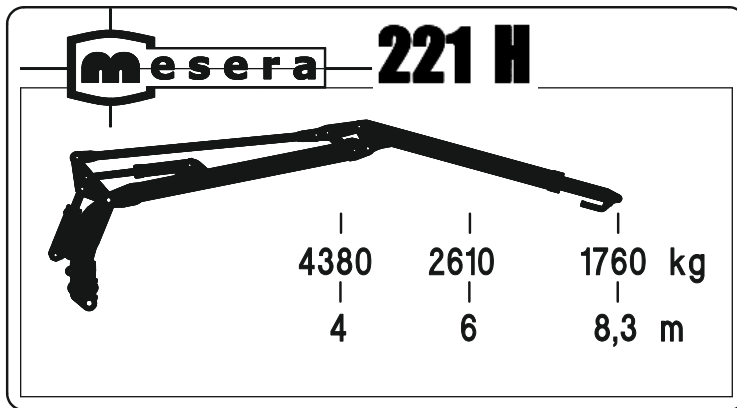

H 83/ H 100

			DIN 15018	H1 B4
Nosto- ja käyttöluokka Lyft- och driftklass	Hoisting class loading group Hubklasse und Beanspruchungsgruppe	Classe de levage et groupe d'utilisation		
Nostomomentti, brutto Lyftmoment, brutto	Lifting moment, gross Hubmoment, brutto	Couple de levage, brut	kNm	188
Nostomomentti, netto Lyftmoment, netto	Lifting moment, net Hubmoment, netto	Couple de levage, net	kNm	-
Suurin ulottuma Max. räckvidd	Max. outreach Max Reichweite	Portee maximum	mm	8380/10030
Puomin jatkeen isku, hydr. Hydraulutskjut	Stroke of boom extension Hydraulischer Ausschub	Portee rallonge, hydraulique	mm	800/2500
Puomiston kääntömomentti, brutto Svängmoment, brutto	Slewing torque, gross Schwenkmoment, brutto	Couple de rotation des bras, brut	kNm	43,6
Puomiston kääntökulma Svängvinkel	Slewing angle Schwenkbereich	Angle de rotation des bras	°	199/240
Kuljetusleveys Transportbredd	Road width Transportbreite	Largeur en position transport Poids avec couvercle sans huile	mm	1250
Paino ilman öljyä ja kuorm.elintä Vikt utan ölja och gripare	Weight without oil and grapple Gewicht ohne Öl und Greifer	Poids sans huile ni équipement de chargement	kg	2500/2590

**PUMPPUSUOSITUS
PUMPREKOMMENDATION**
**PUMP RECOMMENDATION
EMPFEHLUNG FÜR DIE PUMPE**
POMPE PRECONISEE

Max, käyttöpain Max. arbetstryk	Max. working pressure Max. Betriebsdruck	Pression d'utilisation maximal	MPa	24
Öljyvirta Flöde	Oil flow Fördermenge	Debit d'huile	l/min	120
Tehontarve Effektbehov	Power input	Puissance requise	kW	50